

7400 FAMILY

Electrically non-conductive rails with Glas*Mark® violator stripes for added visibility

STEPLADDER FIBERGLASS

Non-conductive side rails for working around electricity



Heavy gauge HolsterTop™ featuring drill holster, offers strength, durability and utility

Twin Stepladders

T7400 Series

4' - 12' 375 lbs. Duty Rating
14' - 20' 300 lbs. Duty Rating

EDGE™

Double riveted step construction for sturdiness

Platform Stepladders

P7400 Series

3', 10' and 12' 300 lbs. Duty Rating
4', 6' and 8' 375 lbs. Duty Rating

EDGE™

Stepladders 7400 Series

LOAD CAPACITY
375 lbs.
TYPE IAA DUTY RATING
Combined weight of user and materials

Aluminum rail shield to protect against abrasion

Provides enhanced bracing strength and increased protection against damage

THE
EDGE™
ENERGY DIFFUSING GEOMETRY

Also available without casters in Model PT7400

Stock's Ladders®

PT7400-4C Series

All are 300 lbs. Duty Rating

WERNER®





7400 FAMILY

Extra Heavy Duty Fiberglass Stepladders


375 lbs. Load Capacity* **TYPE IAA**
Special Duty/Professional Use **DUTY RATING**

- Heavy gauge HolsterTop™ featuring drill holster, offers strength, durability and utility
- Aluminum rail shield helps to protect against abrasion damage
- Double riveted step construction for sturdiness
- Glas*Mark® violator stripes for added visibility
- The Werner EDGE® provides enhanced bracing strength and increased resistance to damage
- Slip-resistant Traction-Tred® steps
- Electrically non-conductive rails

*Not all 7400 series ladders have a 375 lbs. Load Capacity, refer to charts below for each ladder's Load Capacity.

SPECIFICATIONS 7400 Series

Model No.	Size	Approx. Width	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.	Load Capacity ¹
7403	3'	19-3/4"	2.5	13.5	375 lbs
7404	4'	21-1/2"	3.5	16.5	375 lbs
7405	5'	23-1/4"	4.6	20.0	375 lbs
7406	6'	25"	5.8	23.5	375 lbs
7407	7'	26-3/4"	7.1	28.0	375 lbs
7408	8'	28-1/2"	8.5	32.0	375 lbs
7410	10'	32"	11.4	40.0	375 lbs
7412	12'	35-1/2"	14.8	49.5	375 lbs

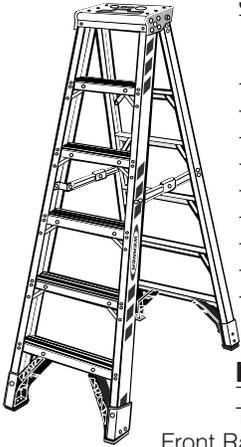


DIMENSIONS

Top: 7-1/4" x 14-7/8" Steps: 3" wide
 Front Rails: 3-1/8" wide Rear Rails: 1-7/8" wide
 Flange: 1-3/16" wide Flange: 1-3/16" wide

SPECIFICATIONS T7400 Series

Model No.	Size	Approx. Width	Approx. Cu. Ft. Per Unit	Approx. Ship Wt. Lbs.	Load Capacity ¹
T7404	4'	21-1/2"	4.5	21.5	375 lbs
T7406	6'	25"	7.3	30.0	375 lbs
T7408	8'	28-1/2"	10.5	40.5	375 lbs
T7410	10'	32"	14.2	51.5	375 lbs
T7412	12'	35-1/2"	18.3	63.5	375 lbs
*T7414	14'	39"	22.8	86.0	300 lbs
*T7416	16'	42-1/8"	27.7	103.5	300 lbs
*T7418	18'	46"	33.1	126.0	300 lbs
*T7420	20'	49-1/2"	38.8	149.0	300 lbs

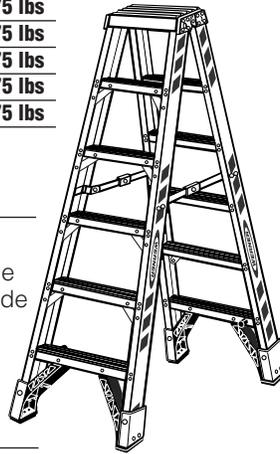


DIMENSIONS

Top: 8-1/4" x 14-7/8" Steps: 3" wide
 Rails: 3-1/8" wide Flange: 1-3/16" wide
 *Rails: 3-5/16" wide

SPECIFICATIONS P7400 Series

Model No.	Height to Platform	Approx. Width	Approx. Cu. Ft. Per Unit	Approx. Ship Wt. Lbs.	Load Capacity ¹
P7403	3'	25-1/4"	5.1	22.0	300 lbs
P7404	4'	27"	6.4	26.0	375 lbs
P7406	6'	30-1/2"	9.1	34.0	375 lbs
P7408	8'	34"	12.2	45.5	375 lbs
P7410	10'	37-1/2"	15.6	54.5	300 lbs

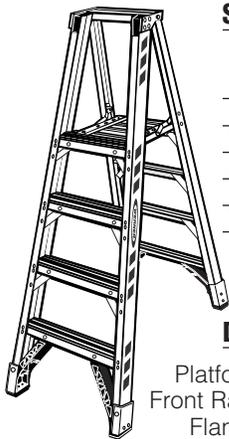


DIMENSIONS

Platform: 14-5/8" x 15" Steps: 3" wide
 Front Rails: 3-1/8" wide Rear Rails: 1-7/8" wide
 Flange: 1-3/16" wide Flange: 1-3/16" wide

SPECIFICATIONS PT7400-4C/PT7400 Series

Model No.	Height to Platform	Approx. Width	Approx. Cu. Ft. Per Unit	Approx. Ship Wt. Lbs.	Load Capacity ¹	Model No. w/o Casters	Approx. Ship Wt. Lbs.
PT7404-4C	4'	25-1/4"	8.4	37.0	300 lbs	PT7404	31.0
PT7406-4C	6'	28-3/4"	12.7	53.0	300 lbs	PT7406	41.5
PT7408-4C	8'	32-1/4"	17.8	60.5	300 lbs	PT7408	54.5
PT7410-4C	10'	35-3/4"	23.7	72.5	300 lbs	PT7410	66.0

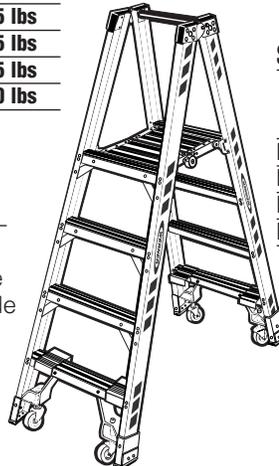

DIMENSIONS

Platform: 12-3/4" x 22" Steps: 3" wide
 Rails: 3-1/8" wide Flange: 1-3/16" wide



GM6433 R2/07 ©2007 Werner Co.

¹Load capacity combines the total weight of both the user and the materials.