


REMOVAL INSTRUCTIONS:


1. When removing anchor, place your thumb inside the anchor loop and your first two fingers around the trigger. Squeeze fingers and thumb together till the trigger and spring fully compress.
2. While squeezing the trigger pull the anchor out of the hole.
3. If the anchor becomes stuck, insert a punch, screwdriver or other object into the hole until touches the top of the cleaning bushing.
4. Lightly tap with a hammer making sure the tool is touching the top of the cleaning bushing while squeezing the trigger. (The cleaning bushing should be easily visible at the edge of the hole).
5. If tool was required to remove the anchor inspect thoroughly for damage after removal. If damage is found remove from service and destroy immediately.

May be used as a anchoring point for a leading edge restraint system. Examples are of optional anchoring point locations. The use of two anchors is not required for leading edge restraint systems unless otherwise specified by the manufacture.

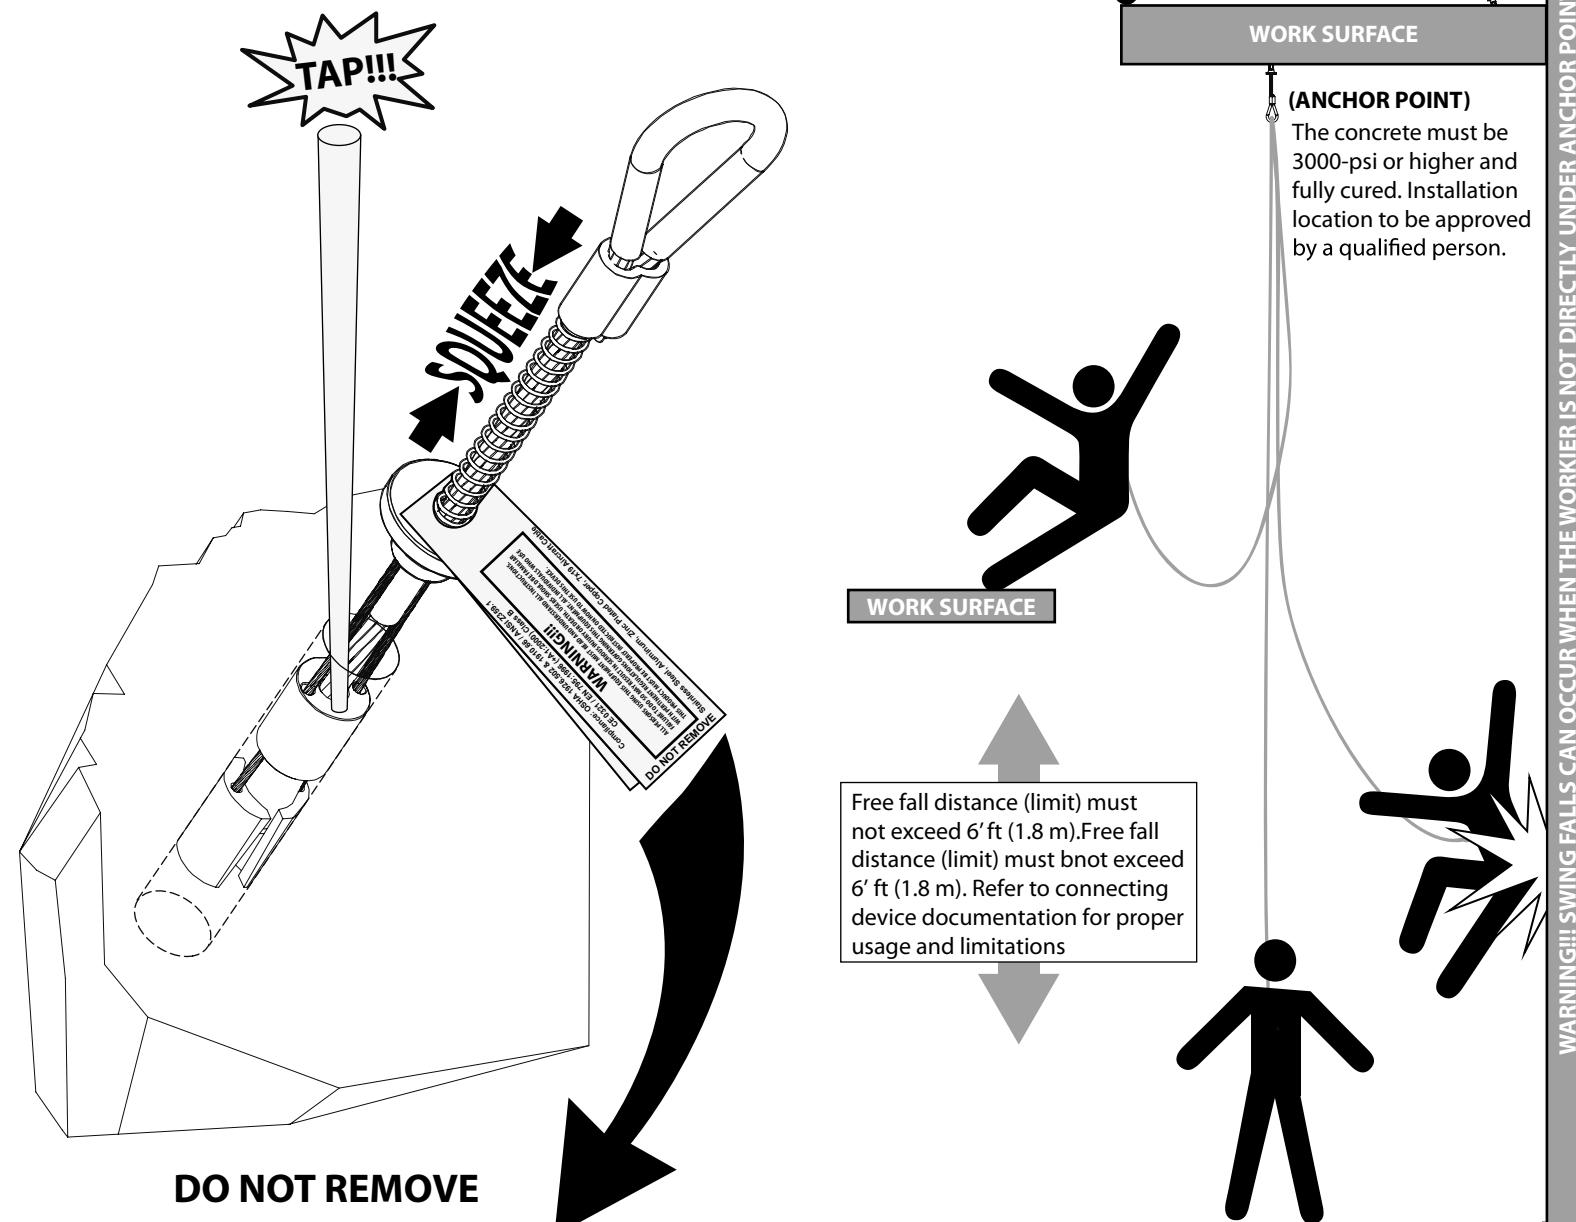


DRILLING & INSTALLATION INSTRUCTIONS:

1. Drill a 3/4" (20mm) diameter hole at least 3.5" (89mm) deep. The drilled hole must be straight and perpendicular to the surface. Make sure the hole is of uniform diameter and free of peaks and valleys on the inner wall.
2. Blow hole clean with compressed air.
3. Always inspect the hole carefully when reusing a previously drilled hole.
4. When placing anchor, place your thumb inside the anchor loop and your first two fingers around the trigger. Squeeze fingers and thumb together till the trigger and spring fully compress.
4. Insert unit at least 3" (76mm) deep into hole and release the trigger. Do not force.
5. Set the unit with a slight tug on the anchor loop.
6. The stop sleeve must always be partially inserted into the hole.

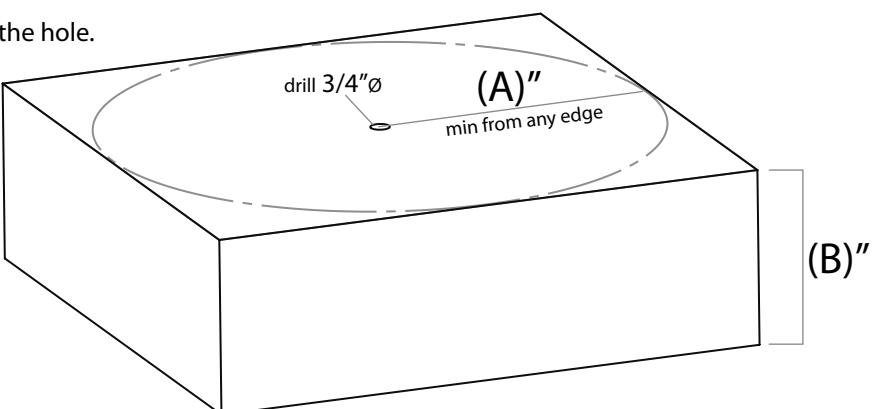

HOLE DRILLING REQUIREMENT CHART

(A)" Minimum distance from edge/corner	(B)" Concrete thickness
6" in. (15.3 cm)	12" in. (30.5 cm)
12" in. (30.5 cm)	5" in. (12.7 cm)

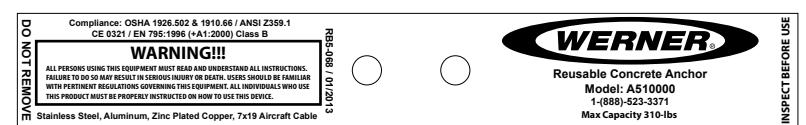

MINIMUM CLEARANCE 3ft (1m)

DECK/FLOOR/GROUND LEVEL

All products subjected to fall arresting forces should be removed from service immediately!