



SMART BOND[®]

**HIGH STRENGTH POLYURETHANE
FOAM ADHESIVE**

Recommended for Installation of



High Performance Moisture Resistant OSB



Compatible with Touch 'n Seal
46" Applicator Gun

**8X MORE
COVERAGE**

**25%^{UP TO} FASTER
APPLICATION**


**POLYURETHANE
STRENGTH**



SMART BOND®

**HIGH STRENGTH POLYURETHANE
FOAM ADHESIVE**

**8X
MORE
COVERAGE**

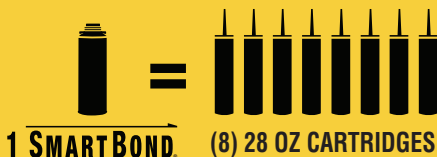

**UP TO
25%
FASTER
APPLICATION**

Less Change Out &
Easier to Gun



Compatible with Touch 'n Seal 46" Applicator Gun


Reduces Reaching, Bending Over & Walking on Joists

RECOMMENDED FOR:



**POLYURETHANE
STRENGTH**

Tenacious Adhesion for Squeak Free Floors

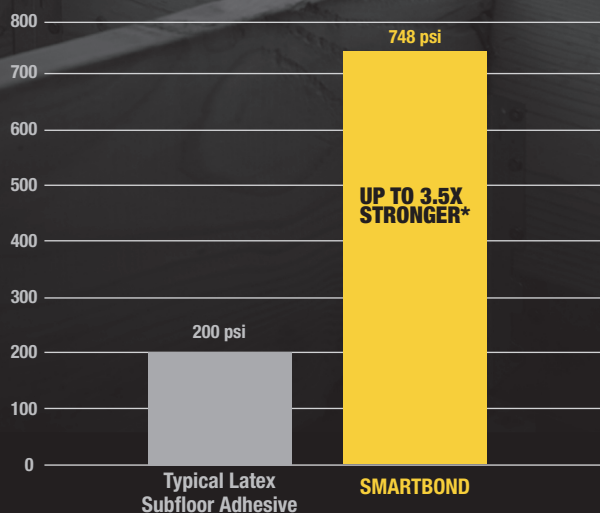

POWERFUL ADHESION TO:

- ✓ Plywood
- ✓ Moisture Resistant Enhanced OSB
- ✓ OSB
- ✓ Wet, Frozen & Treated Lumber

PRODUCT DETAILS:

Application Temperature: 23°F - 105°F

Service Temperature: -40°F - 195°F

Open Time: 20 minutes

Specifications: Meets ASTM D3498 & APA AFG-01

Shelf Life: 12 months

SKU SPECIFICATIONS

Product Name	Size	Package Code	GTIN	Case Pack	Case Weight	Case Dims. (LxWxH)	Case Volume (cu ft)	Cases Per Pallet
SmartBond Subfloor Gun Grade Adhesive	20 oz	0 70798 00042 1	100 70798 00042 8	6	9.2 lb	5.5" x 8" x 9.25"	0.24	200

*Up to 3.5X Stronger than typical latex subfloor adhesives. Shear strength test results based on D-3498 dry lumber strength test.
DryMax is a trademark owned by Georgia-Pacific Wood Products LLC.

dap.com 30783 (11/18)