




# A510022

## 10k Mega-Swivel Anchorage Connector with Straight Loop Attachment Bolt

### FEATURES

- Minimum Breaking Strength (MBS): 10,000 pounds
- 360 degree swivel
- Zinc plated steel, 3 ½ inch long, 5/8 inch bolt and lock washer
- Compatible with A510021 Straight Loop Insert
- Meets ANSI Z359.18-2017
- Meets OSHA 1910.140 and 1926.502 requirements

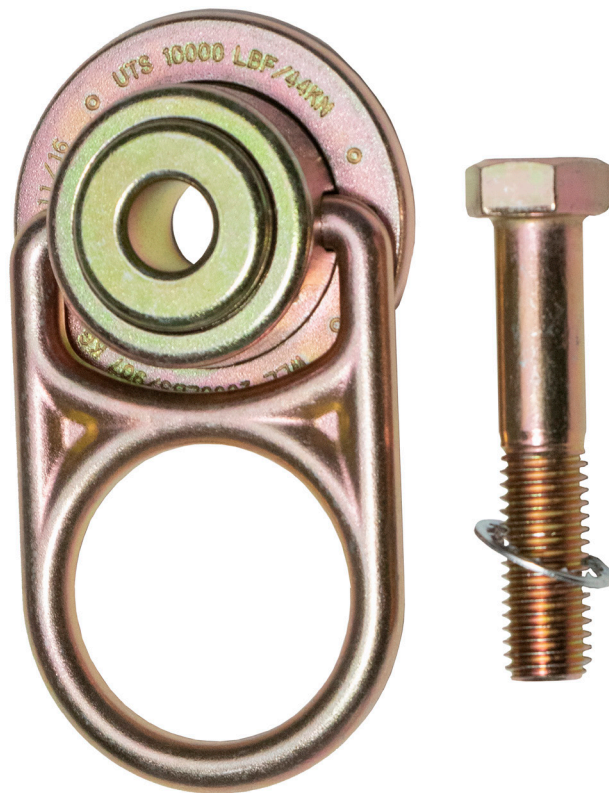

### SPECIFICATIONS

Model No.	Material	Connection Size	Application	Minimum Breaking Strength (MBS)	Approx. Weight	Compliance Standards
A510022	Steel	2 ¼ in (57 mm)	Concrete	10,000 lbs (44.4 kN)	2.0 lbs (0.91 kg)	ANSI Z359.18-2017 OSHA 1910 & 1926

\*See User Instructions for more information.

**⚠ WARNING:** Compliant fall protection equipment must only be used as it was designed and adhere to the hierarchy of controls as discussed in ANSI Z359.2. Users MUST read and follow all user instructions provided with the product. Before using a fall arrest system, users must be trained in the safe use of the system, as required by OSHA 29 CFR 1910.30 and 1926.503, or local safety regulations. Misuse or failure to heed these warnings and instructions may result in injury or even death.

WORK SAFE! WORK SMART!

## Technical Data Sheet

WernerCo Corporate Headquarters: 555 Pierce Road, Suite 300, Itasca, IL 60143

TEL: 888-523-3370 FAX: (724) 588-0315 [www.wernerco.com](http://www.wernerco.com)