



DYNAGRIP®

THE GRIP THAT OUTPERFORMS™

HEAVY DUTY MAX


HYBRID TECHNOLOGY

Exterior / Interior
CONSTRUCTION ADHESIVE



UP TO
5x

**FASTER BOND
STRENGTH***



**ALL
MATERIALS***



**EASY TO
GUN**

* Develops strength up to 5x faster than polyurethane based heavy duty adhesives within 24 hours of application.
+ Not recommended for house wrap such as Tyvek® and other fluoropolymer based substrates such as Teflon®.




DYNAGRIP®
THE GRIP THAT OUTPERFORMS™

HEAVY DUTY MAX

HYBRID TECHNOLOGY

UP TO 5X FASTER BOND STRENGTH*

EASY TO GUN

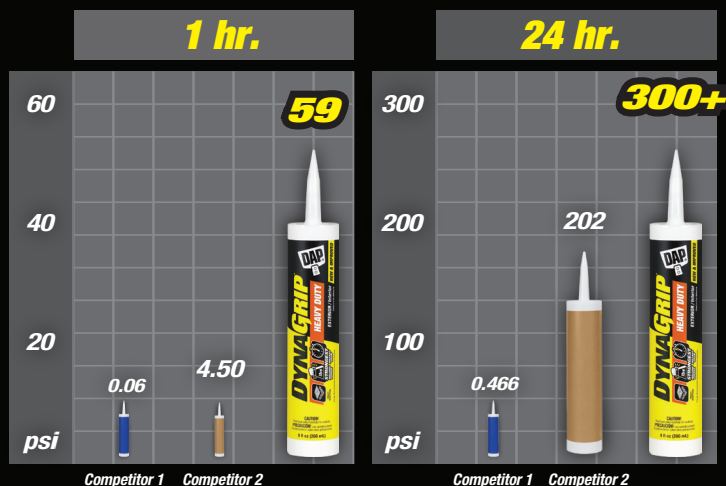

Reduces user fatigue & prevents dripping of adhesive on finished surfaces.

ALL MATERIALS



PRODUCT DETAILS

RECOMMENDED USE: Subfloor, deck, structural paneling & drywall, mirror, marble, granite, tub surround installation, landscape block and masonry.

NOT RECOMMENDED FOR: +House wrap such as Tyvek® and other fluoropolymer based substrates such as Teflon®.

ADHERES TO: • Aluminum • Brick • Concrete • Drywall • Fiber Cement • OSB • Enhanced OSB • Metal • Wood • Plywood • PVC • Marble • Granite • Stone • Masonry • Foamboard • Most Common Building Materials

SPECIFICATIONS: Meets or Exceeds - ASTM D3498, ASTM C557

TYPICAL PHYSICAL PROPERTIES:

Solids: 99.5% Shelf Life: 12 months

Open Time 15 minutes Skin Time: 10 minutes

Cure Time: 24 hrs

Coverage: 9 fl oz 1/4" bead yields 27 linear ft. 3/8" bead yields 12 linear ft.

28 fl oz 1/4" bead yields 86 linear ft. 3/8" bead yields 38 linear ft.

APPLICATION TEMPERATURE: 20°F - 120°F

SERVICE TEMPERATURE: -40°F - 200°F

SKU SPECIFICATIONS

Description	Size	Package Code	GTIN	Case Pack	Case Weight	Case Dims. (LxWxH)	Case Volume (cu. ft.)	Cases Per Pallet
DynaGrip Heavy Duty Max	9 oz	0 70798 27511 9	100 70798 27511 6	12	13.6 lbs.	8" x 6" x 12"	0.33	108