

FALL PROTECTION


MAX PATROL CLASS 1

NEW ANSICode Compliance

IMPROVED SRLS MEET ANSI Z359.14-2021

- Maximum Freedom of Movement
- Provides clear identification of Class I: Overhead Only (Dorsal D-Ring height or above)
- 24" Max Arrest Distance
- 400lb Capacity per OSHA



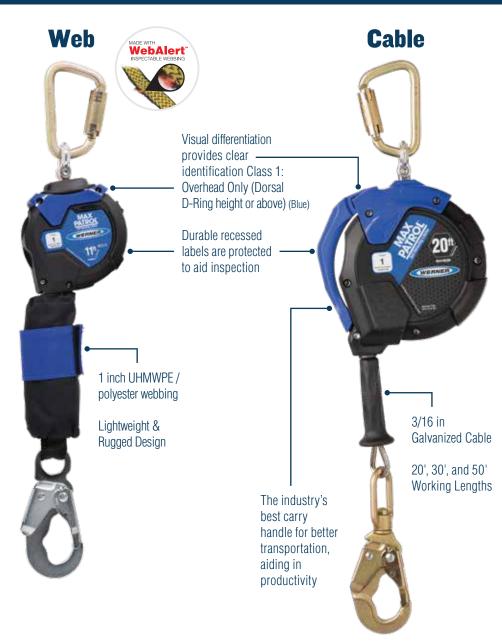

SPECIFICATIONS

0. 20									
MODEL NO.	LENGTH	HOUSING	HOUSING CONNECTOR	LIFELINE CONSTITUENT	LIFELINE CONNECTOR	WEIGHT			
R430011	11'	Thermoplastic	Steel Carabiner	1 in UHMWPE / polyester webbing	Steel Snap Hook	3.5 lbs			
R430011-R	11'	Thermoplastic	Steel Carabiner	1 in UHMWPE / polyester webbing	Aluminum Rebar Hook	3.9 lbs			
R430011-SR	11'	Thermoplastic	Steel Carabiner	1 in UHMWPE / polyester webbing	Steel Rebar Hook	4.2 lbs			
R410020	20'	Thermoplastic	Steel Carabiner	Galvanized Steel Cable	Swivel Snap Hook	8.2 lbs			
R410030	30'	Thermoplastic	Steel Carabiner	Galvanized Steel Cable	Swivel Snap Hook	9.9 lbs			
R410050	50'	Thermoplastic	Steel Carabiner	Galvanized Steel Cable	Swivel Snap Hook	14.7 lbs			







FALL PROTECTION

MAX PATROL CLASS 2

NEW ANSI Code Compliance

IMPROVED SRLS MEET ANSI Z359.14-2021

- Maximum Freedom of Movement
- The SRL is tested and approved for use over steel beam, precast concrete, and b-deck
- Provides clear identification of Class 2: Overhead, Foot Level, Leading Edge
- 24" Max Arrest Distance when used overhead
- 400lb Capacity per OSHA





SPECIFICATIONS

MODEL NO.	LENGTH	HOUSING	HOUSING CONNECTOR	LIFELINE CONSTITUENT	LIFELINE CONNECTOR	WEIGHT
R410020LE	20'	Thermoplastic	Steel Carabiner	Galvanized Cable	Snap Hook	8.8 lbs
R410030LE	30'	Thermoplastic	Steel Carabiner	Galvanized Cable	Snap Hook	10.5 lbs
R410050LE	50'	Thermoplastic	Steel Carabiner	Galvanized Cable	Snap Hook	15.3 lbs