



SMART BOND[®]

**HIGH STRENGTH POLYURETHANE
FOAM ADHESIVE**

Recommended for Installation of



High Performance Moisture Resistant OSB



Compatible with All Sharpshooter
Applicator Guns

8X MORE
COVERAGE

25% UP TO FASTER
APPLICATION


**POLYURETHANE
STRENGTH**



SMART BOND[®]


**HIGH STRENGTH POLYURETHANE
FOAM ADHESIVE**

**8X
MORE
COVERAGE**

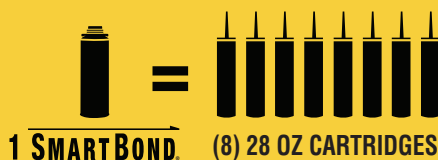

**POLYURETHANE
STRENGTH**

Tenacious Adhesion for Squeak Free Floors

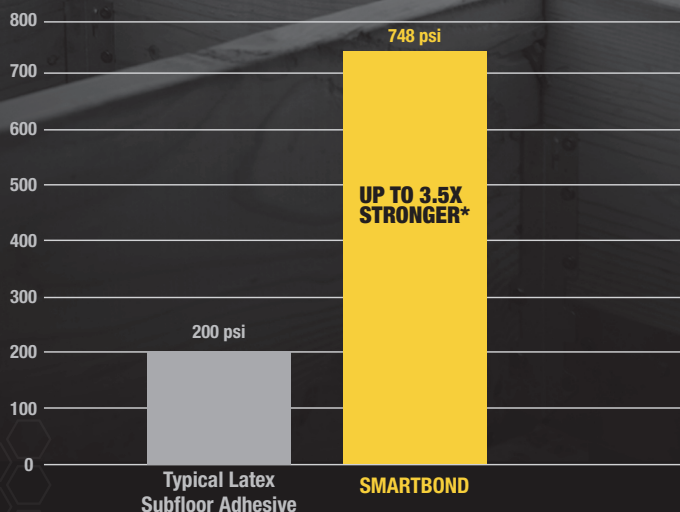

**UP TO
25%
FASTER
APPLICATION**

**Less Change Out &
Easier to Gun**

**COMPATIBLE WITH
SHARPSHOOTER XXL
PREMIUM 44"
APPLICATOR GUN**



**Reduces Reaching,
Bending Over &
Walking on Joists**

POWERFUL ADHESION TO:

- ☒ Plywood
- ☒ OSB
- ☒ Moisture Resistant Enhanced OSB
- ☒ Wet, Frozen & Treated Lumber

PRODUCT DETAILS:

Application Temperature: 23°F - 105°F

Service Temperature: -40°F - 195°F

Open Time: 20 minutes

Specifications: Meets ASTM D3498 & APA AFG-01

Shelf Life: 12 months

RECOMMENDED FOR INSTALLATION OF



**High Performance Moisture Resistant OSB to help
PREVENT FLOOR SQUEAKS**



SKU SPECIFICATIONS

Product Name	Size	Package Code	GTIN	Case Pack	Case Weight	Case Dims. (LxWxH)	Case Volume (cu ft)	Cases Per Pallet
SmartBond Subfloor Gun Grade Adhesive	20 oz	0 70798 00042 1	100 70798 00042 8	6	9.2 lb	5.5" x 8" x 9.25"	0.24	200

*Up to 3.5X Stronger than typical latex subfloor adhesives. Shear strength test results based on D-3498 dry lumber strength test.

DryMax is a trademark owned by Georgia-Pacific Wood Products LLC.