



Paddles for the BN Power Mixers

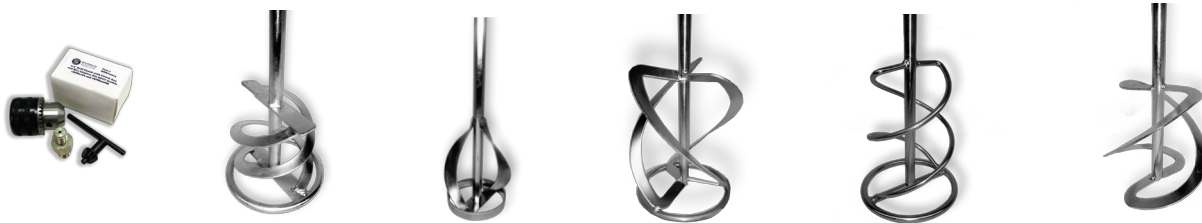

BNRA0315	1/2" Drill Chuck
BNR001 - Specify Diameter	120 mm (4.75") or 140 mm (5.50") or 160 mm (6.30") • Overall length: 60 cm (24") • Designed for plasters, adhesive mortars, mortars, tile adhesives and fillers, best for sticky and viscous materials. • Material Flow: Bottom to Top • Connection: M14 x 2 male threads
BNR002-57	Diameter: 57 mm (2.25") • Overall length: 13.5" • Designed for paints, lacquers, thin coatings, and ready-mix plaster. • Material Flow: Top to Bottom • Connection: 5/16" hex shank
BNR003- Specify Diameter	120 mm (4.75") or 140 mm (5.50") or 160 mm (6.30") • Overall length: 60 cm (24") • Designed for concrete, mortars, plasters, heat-insulating plasters, and epoxy resin with sand, best for heavy and high viscosity materials. • Material Flow: Top to Bottom • Connection: M14 x 2 male threads
BNR004- Specify Diameter	120 mm (4.75") or 140 mm (5.50") • Overall length: 60 cm (24") • Designed for thinset, tile adhesive, grout, adhesive mortars, ready-mix mortars, and pointing mortars, and fillers, best for small volumes on high speed mixers. • Material Flow: Bottom to Top • Connection: M14 x 2 male threads
BNR005-120	Diameter: 120 mm (4.75") • Overall length: 60 cm (24") • Designed for plasters, adhesive mortars, tile adhesive and fillers, best for sticky and viscous materials. • Material Flow: Bottom to Top • Connection: M14 x 2 male threads

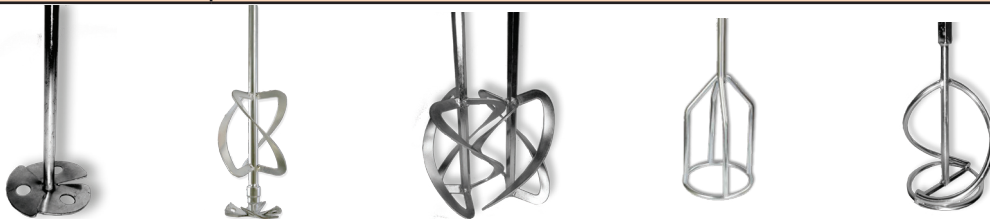

BNR006-100	Diameter: 100 mm (3.875") • Overall length: 60 cm (24") • Designed for paints, lacquers, glazings, primers, and paste, best for small volumes of low viscosity materials • Recommended to use on BNR6169. • Material Flow: Top to Bottom • Connection: M14 x 2 male threads
BNR007-140	Diameter: 140mm (5-1/2") • This is a special paddle that fits the BNR7000 Twin-Master Mixer™. It turns in two directions at the same time.
BNR008-120K Paddles sold in pairs left & right	Diameter: 120 mm (4.75") Overall length: 60 cm (24") • Designed for concrete, cement, mortars, and grouts with aggregate less than 3/8" diameter. Also for gypsum lime plaster, fibrated aluminum roof coatings and paints. Not for highly viscous materials. • Material Flow: Top to Bottom • Connection: 13 mm or 1/2" Hex Shank, for BNR6402K mixer.
BNR009-Specify Diameter	120 mm (4.75") or 140 mm (5.50") • Overall length: 60 cm (24") • Designed for fillers, bitumen coatings, joint cement, epoxy-resin compounds, and grouting compounds, best for prevention of lump formation and lessens adding air into the mixture. Mixture flow is parallel. • Connection: M14 x 2 male threads
BNR010- Specify Diameter	120 mm (4.75") or 140 mm (5.50") • Overall length: 60 cm (24") • Designed for gypsum-lime plaster, fibrated aluminum roof coatings, and paints. This paddle can be disassembled in two pieces and fit into a carrying case. • Material Flow: Top to Bottom • Connection: M14 x 2 male thread